







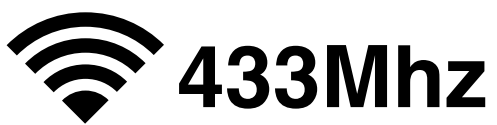




















# CM-03

TUBULAR MOTOR 1.1 NM Ø 30-50MM



Technology	 
Control options	   
Power supply	Battery
Input	USB-C 5V
Motor diameter	25 mm
Motor length	580 mm
Min. blind width	635 mm
Tube compatibility	38-42-50 mm
Torque	1.1 Nm
Speed	28 rpm
Approx. blind size (cm)	280x250
Battery capacity	28,08Wh 2600mAh (10,8V)
Charging life cycle	350
Charging life time	12 months
Certifications	  

# MOTIONBLINDS

	ARTICLE CODE	DESCRIPTION	DRAWING
MOTOR	CM-03	Tubular motor pull battery 25 mm 1.1Nm 28rpm	
	RC3136-*	Roller DC pullmotor cover	
38 MM	RC3083-ABC	Drive plug 38 mm DC motor	
	RC3084-ABC	Crown adapter 25-38 mm	
42-50 MM	RC3081-ABC	Drive plug 42-50 mm DC motor	
	RC3082-ABC	Crown adapter 25-42mm	
PULL	CM-27-TR	Pull motor chain connector	
	V15DP-*	Operating chain plastic 4.5 mm 6.2 mm	
	PU10-1000-A	Pull wand without handle metal	
	CM-37-TR	Pull motor cord connector	
	WPPC25-*	Pulling cord 1.7mm	
	V16PCT-TR	Connecting clip plastic click type transparent	
	PU06-*	Setup-code tassel cover	
CABLE	CM-41	USB-C cable 3 mtr white	

\* More options on [my.coulisse.com](http://my.coulisse.com)

# MOTIONBLINDS

## START GUIDES

ARTICLE CODE	DESCRIPTION	DRAWING
SA-12358	Start Guide Pull Battery EN	
SA-12359	Start-Anleitung Pull Batterie DE	
SA-12360	Startgids Pull Batterij NL	
SA-12361	Guía de Inicio Bateria con Tirador ES	
SA-12362	Guide de Démarrage Batterie avec Traction FR	
SA-12363	Instrukcja skrócona Bateria z Funkcja Pull PL	
SA-12364	Guía de Inicio Bateria Acionamento por Toque PT	

