






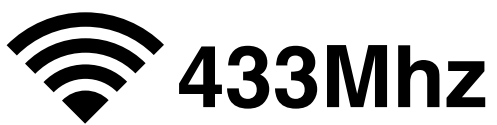





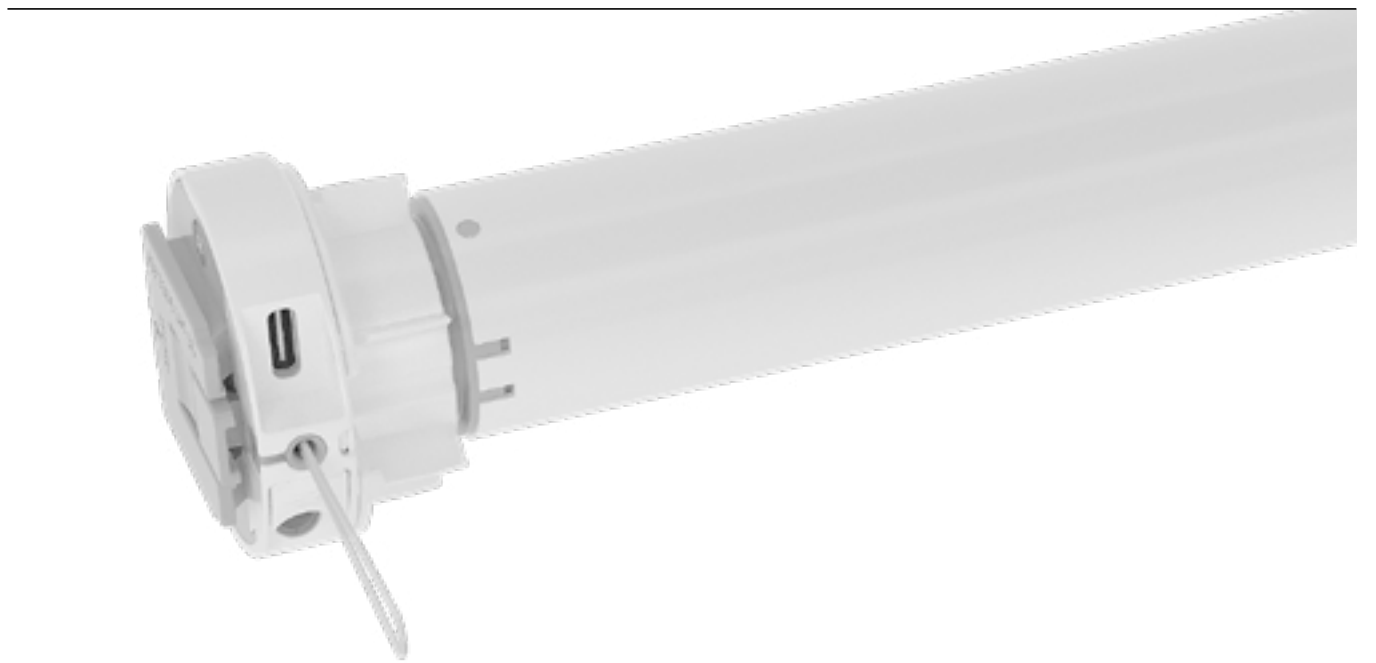















CM-05

TUBULAR MOTOR 2.0 NM Ø 38-65MM



Technology	 
Control options	  
Power supply	Battery
Input	USB-C 5V
Motor diameter	28 mm
Motor length	721 mm
Min. blind width	778 mm
Tube compatibility	38-42-50-65 mm
Torque	2.0 Nm
Speed	28 rpm
Approx. blind size (cm)	300x300
Battery capacity	28,08Wh 2600mAh (10,8V)
Charging life cycle	350
Charging life time	12 months
Certifications	  

MOTIONBLINDS

	ARTICLE CODE	DESCRIPTION	DRAWING
MOTOR	CM-05	Tubular motor pull battery radio 28mm 2Nm 28rpm	
	RC3136-*	Roller DC pullmotor cover	
38 MM	RC3107-ABC	Crown 38mm for 2Nm motor CM-05	
	RC3083-ABC	Drive plug 38 mm DC motor	
	RC3081-ABC	Drive plug 42-50 mm DC motor	
42-50 MM	RCU-13-W	Tube adapter 65mm White	
	RC4032-ABC	Drive plug 65mm DC motor	
65 MM	CM-27-TR	Pull motor chain connector	
	V15DP-*	Operating chain plastic 4.5 mm 6.2 mm	
PULL	PU10-1000-A	Pull wand without handle metal	
	CM-37-TR	Pull motor cord connector	
	WPPC25-*	Pulling cord 1.7mm	
	V16PCT-TR	Connecting clip plastic click type transparent	
	PU06-*	Setup-code tassel cover	
	CABLE	CM-41	USB-C cable 3 mtr white

* More options on my.coulisse.com

MOTIONBLINDS

ARTICLE CODE	DESCRIPTION	DRAWING
SA-12358	Start Guide Pull Battery EN	
SA-12359	Start-Anleitung Pull Batterie DE	
SA-12360	Startgids Pull Batterij NL	
SA-12361	Guía de Inicio Bateria con Tirador ES	
SA-12362	Guide de Démarrage Batterie avec Traction FR	
SA-12363	Instrukcja skrócona Bateria z Funkcja Pull PL	
SA-12364	Guía de Inicio Bateria Acionamento por Toque PT	